

1.5.1 V_{DD} and V_{SS}

Power is supplied to the microcontroller's digital circuits using these two pins. V_{DD} is the positive supply and V_{SS} is ground.

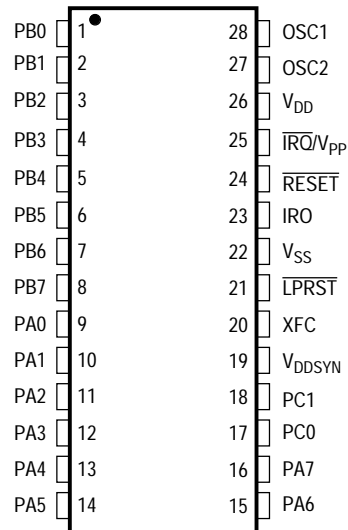


Figure 1-2. 28-Pin SOIC Pinout

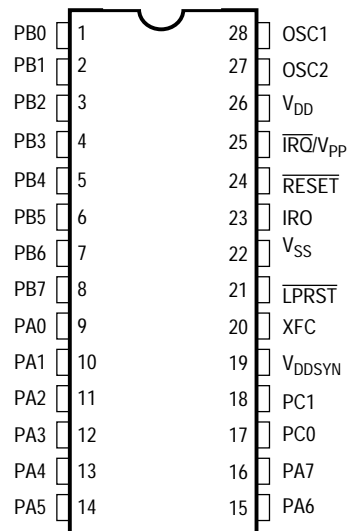


Figure 1-3. 28-Pin PDIP Pinout